

VpCI®-329

PRODUCT DESCRIPTION

VpCI-329 is a vapor corrosion inhibiting oil-based concentrate for use with lubricating, hydraulic, and preservation oils. VpCI-329 provides excellent protection in sheltered outdoor/indoor conditions. VpCI-329 protects in two unique ways by offering a tenacious film, which clings to metal surfaces as well as vapor phase inhibitors into the air above the oil. The vapors condense and form a protective barrier on metal surfaces that are not in contact with the oil. This combination allows complete protection to internal system parts.

FEATURES

- Contains no hazardous chromates, nitrites or phosphate inhibitors
- High flash and fire points
- Protects ferrous metals, zinc, galvanized steel, aluminum, copper, brass, cadmium, and silver
- Zinc-free
- Compatible with most oils
- Can be fogged into metal compartments
- Parts can be dipped and stored
- VpCI-329 provides good salt spray resistance
- NATO #6850-66-132-6100
NSN #6850-01-470-3359
- VpCI-329 conforms to MIL-PRF-46002C(Grade1)

METHOD OF APPLICATION

Short-term protection: One part VpCI-329 to 20 parts oil.

Medium-term protection: One part VpCI-329 to 10 parts oil.

Long-term protection: One part VpCI-329 to 5 parts oil.

Storing metal parts: Spray, dip or brush VpCI-329 onto metal parts before storage.

Storage for lubricating, hydraulic and metal cutting systems: Add Cortec® VpCI-329 to oil in engines before storage.

For best results, add VpCI-329 to the oil, then cycle or run the engine for 10 minutes before shutdown. After storage, the engine can be normally operated. There is no need to remove VpCI-329 from an operating engine.

TYPICAL PROPERTIES

Appearance	Tan to brown viscous liquid
Carrier	Light naphthenic oil
Corrosion Resistance	Up to 60 months
Coverage	960-1450 ft ² /gal (24-36 m ² /l)
Drying Time	Remains tacky
Film Thickness (dry film)	1-1.5 mils (25-37.5 microns)
Film Type	Oily
Flash Point	295°F (146°C)
Non-volatile Content	91-95%
Pour Point	-30°F (-34°C)
Removal Methods	Petroleum solvent cleaner/ alkaline cleaners (VpCI-416/ VpCI-419)
Viscosity	100-700 cps
Density	7.4-7.7 lb/gal (0.89-0.92 kg/l)


PACKAGING AND STORAGE

VpCI-329 is packaged in 5 gallon (19 liter) plastic pails, 55 gallon (208 liter) metal drums, totes, and bulk. The product should be sealed before storage. Agitate before each use. The shelf life of VpCI-329 is up to 24 months.



VCI 329

Determination of Concentration by Titration

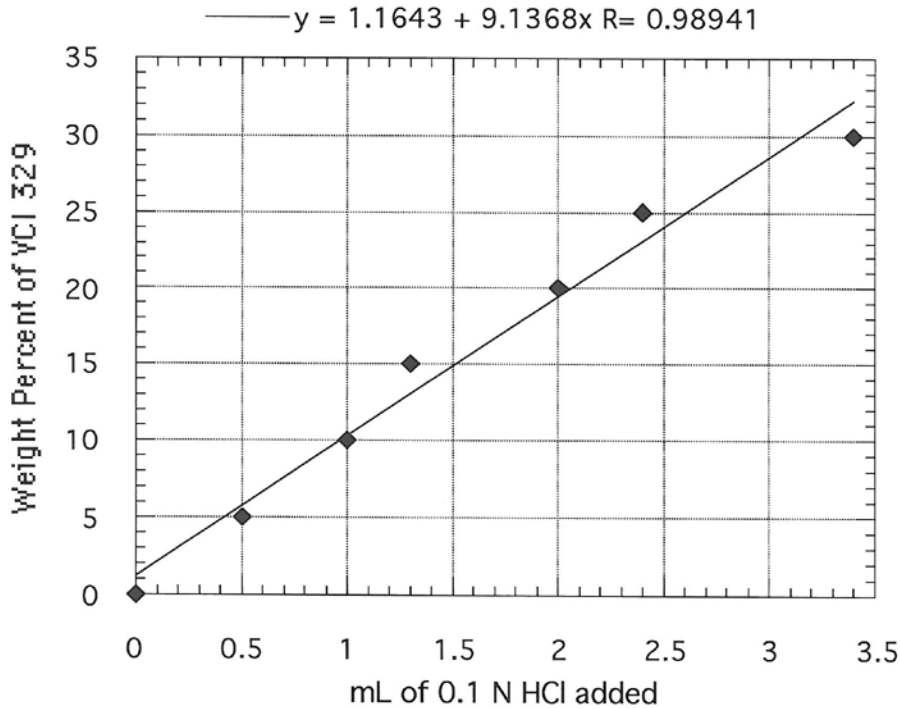

FOR INDUSTRIAL USE ONLY
KEEP OUT OF REACH OF CHILDREN
KEEP CONTAINER TIGHTLY CLOSED
NOT FOR INTERNAL CONSUMPTION
CONSULT MATERIAL SAFETY DATA SHEET FOR MORE INFORMATION

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



Distributed by:

4119 White Bear Parkway, St. Paul, MN 55110 USA
Phone (651) 429-1100, Fax (651) 429-1122
Toll Free (800) 4-CORTEC, E-mail info@corotecvci.com
Internet <http://www.corotecvci.com>

printed on recycled paper  100% post consumer
Revised 8/11/10. Cortec Corporation 1998-2010. All rights reserved. Supersedes: 5/2/06.
© 2010, Cortec Corporation. All Rights Reserved. Copying of these materials in any form without the written authorization of Cortec Corporation is strictly prohibited.